


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

USB A TYPE MALE
PLASTIC:BLACK

L±T

MINI USB 4P MALE
PLASTIC:BLACK

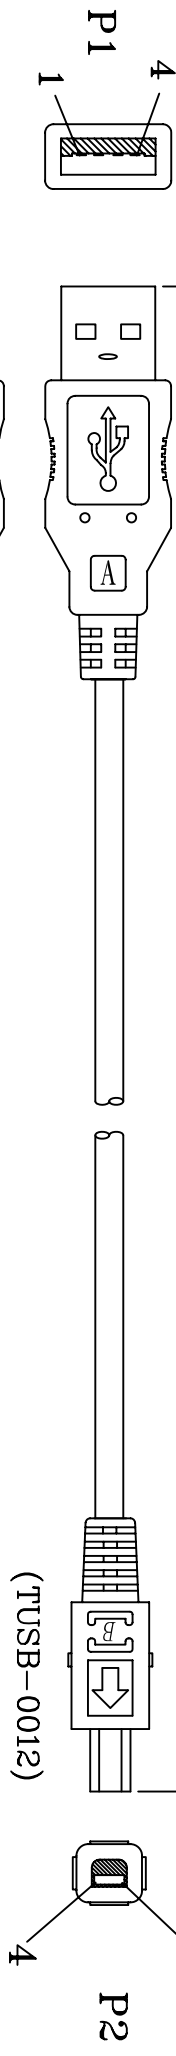

NOTES:

1. CABLE:

UL-2725 [28AWG(7/0.127 T.C)*1PAIR+28AWG(7/0.127 T.C)*2C
+AL/MY+DRAIN WIRE+BRAID(65% ALUMINUM)] PVC JACKET;
OD:φ3.8±0.15mm COLOR:MATT BLACK(NK-K01) REV 2.0.(C2725525BA)

2. CONNECTORS:

P1:USB A TYPE MALE GOLD FLASH CONTACT;
NICKEL PLATED SHELL

P2:(MITZUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01)

4. TEST REQUEST:

<1>.100% OPEN SHORT & MIS WIRE TEST.

<2>.CONTACT RESISTANCE 3Ω MAX.

<3>.INSULATION RESISTANCE 10MΩ MIN.

5.PACKING:<1>EACH PC/POLYBAG+EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON/ROHS LABEL(L*W=35*22mm)

+EAN CODE LABEL

P1	RED	1	_____	P2	1	_____
	WHITE	2	_____		2	_____
	GREEN	3	_____		3	_____
	BLACK	4	_____		4	_____
	SHELL	BRAID	_____		SHELL	_____

Tolerance	Inch	M/M
X	.015	.30
.XX	.010	.10
.XXX	.005	.05


Draw	PANNIE 02/26/07
Check	Engr

170-3046-2	CU0017	3000±30	4260113564172
170-3046-1	CU0016	1800±30	
DWG	P/N	L±T(mm)	EAN CODE

Title		2DIRECT GMBH	
Customer		P/N: CU0016	
App'd	Customer	E-DIR	
Scale	NONE	Units	m/m
Dwg No.	170-3046	REV:A	Sheet 1/2


LTR	REV.	DESCRIPTION	DATE

POLYBAG

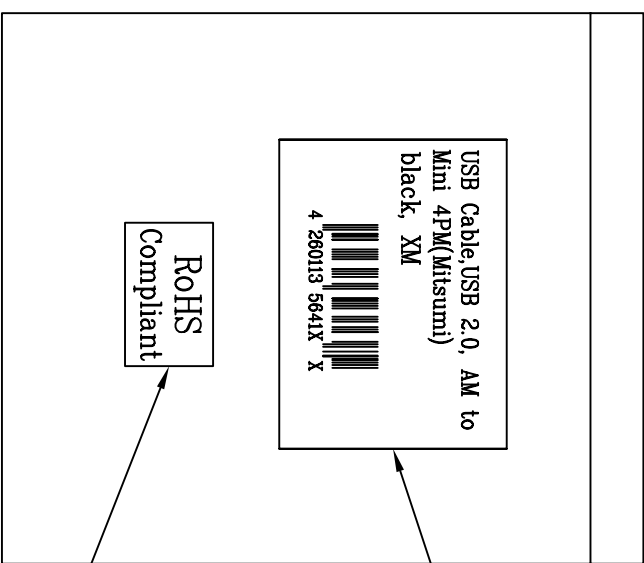

LABEL POSITION

WHITE BASE BLACK WORDS
(L*W= 35*22mm)

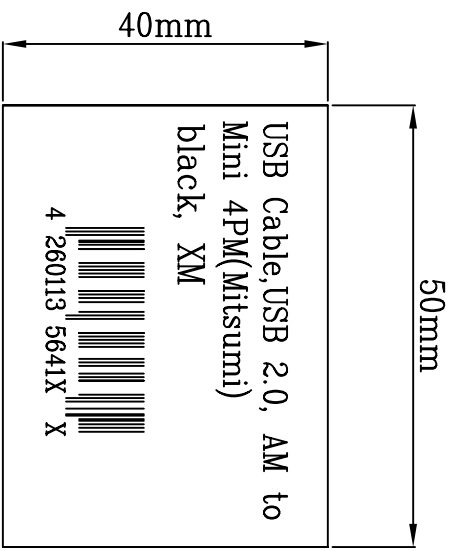

LABEL
(#=CABLE LENGTH)

Tolerance	Inch	M/M	2DIREKT GMBH			
X	.015	.30	Title USB A(M)-MINI USB 4P(M) CABLE(REV 2.0)			
.XX	.010	.10				
.XXX	.005	.05				
Draw PANNE 02/26/07			Customer P/N: CU0016			
Check			App'd	Customer E-DIR		
Engr			Scale NONE	Units	m/m	Third Angle Projection
			Dwg No. 170-3046	REV:A	Sheet 2/2	